

Technisches Datenblatt

Bezeichnung

Kategorie	Kontakte
Serie	CC
Kontakte Typ	Crimpkontakte
Form	gedrehte
Geschlecht	Buchse

Technische Kennwerte

Pin Durchmesser	4mm
Bemessungsstrom	40A
Leiterquerschnitt	10mm ²
Leiterquerschnitt(AW)	AWG 8
Durchgangswiderstand	<1mΩ
Abisolierlänge	12mm

Materialeigenschaften

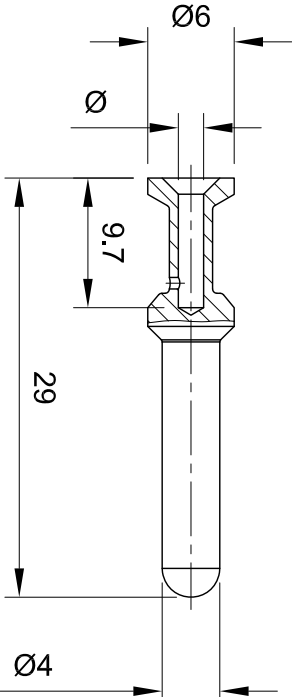
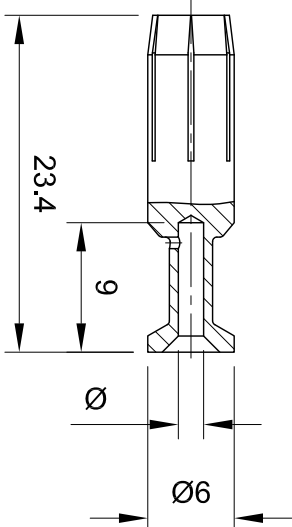

Werkstoff(Kontakte)	Kupferlegierung
Oberfläche(Kontakte)	versilbert
Steckzyklen	≥500

Spezifikationen und Zulassungen

CE	Ja
RoHS	Konform
China RoHS	Konform

Kaufmännische Daten

Herkunftsland	China
europäische Zolltarifnummer	85366990

1	2	3	4	5	6																																																																																	
A	Male contact 			Female contact 																																																																																		
B				B																																																																																		
C	<table><thead><tr><th colspan="2">Silver plated</th><th rowspan="2">Gender</th><th rowspan="2">Ø</th><th rowspan="2">Conductor cross-section in mm²</th><th rowspan="2">Stripping length in mm</th></tr><tr><th>Part No.</th><th>Type Name</th></tr></thead><tbody><tr><td>10 34 000 7100</td><td>CCS-1.5-M</td><td>Male</td><td>1.78</td><td>1.5</td><td>9.5</td></tr><tr><td>10 34 000 7101</td><td>CCS-2.5-M</td><td>Male</td><td>2.28</td><td>2.5</td><td>9.5</td></tr><tr><td>10 34 000 7105</td><td>CCS-3.0-M</td><td>Male</td><td>2.58</td><td>3.0</td><td>9.5</td></tr><tr><td>10 34 000 7102</td><td>CCS-4.0-M</td><td>Male</td><td>2.88</td><td>4.0</td><td>9.5</td></tr><tr><td>10 34 000 7103</td><td>CCS-6.0-M</td><td>Male</td><td>3.53</td><td>6.0</td><td>9.5</td></tr><tr><td>10 34 000 7104</td><td>CCS-10-M</td><td>Male</td><td>4.3</td><td>10</td><td>Depending on isolation body</td></tr><tr><td>10 34 000 7200</td><td>CCS-1.5-F</td><td>Female</td><td>1.78</td><td>1.5</td><td>9.5</td></tr><tr><td>10 34 000 7201</td><td>CCS-2.5-F</td><td>Female</td><td>2.28</td><td>2.5</td><td>9.5</td></tr><tr><td>10 34 000 7205</td><td>CCS-3.0-F</td><td>Female</td><td>2.58</td><td>3.0</td><td>9.5</td></tr><tr><td>10 34 000 7202</td><td>CCS-4.0-F</td><td>Female</td><td>2.88</td><td>4.0</td><td>9.5</td></tr><tr><td>10 34 000 7203</td><td>CCS-6.0-F</td><td>Female</td><td>3.53</td><td>6.0</td><td>9.5</td></tr><tr><td>10 34 000 7204</td><td>CCS-10-F</td><td>Female</td><td>4.3</td><td>10</td><td>Depending on isolation body</td></tr></tbody></table>					Silver plated		Gender	Ø	Conductor cross-section in mm²	Stripping length in mm	Part No.	Type Name	10 34 000 7100	CCS-1.5-M	Male	1.78	1.5	9.5	10 34 000 7101	CCS-2.5-M	Male	2.28	2.5	9.5	10 34 000 7105	CCS-3.0-M	Male	2.58	3.0	9.5	10 34 000 7102	CCS-4.0-M	Male	2.88	4.0	9.5	10 34 000 7103	CCS-6.0-M	Male	3.53	6.0	9.5	10 34 000 7104	CCS-10-M	Male	4.3	10	Depending on isolation body	10 34 000 7200	CCS-1.5-F	Female	1.78	1.5	9.5	10 34 000 7201	CCS-2.5-F	Female	2.28	2.5	9.5	10 34 000 7205	CCS-3.0-F	Female	2.58	3.0	9.5	10 34 000 7202	CCS-4.0-F	Female	2.88	4.0	9.5	10 34 000 7203	CCS-6.0-F	Female	3.53	6.0	9.5	10 34 000 7204	CCS-10-F	Female	4.3	10	Depending on isolation body	C
Silver plated		Gender	Ø	Conductor cross-section in mm²	Stripping length in mm																																																																																	
Part No.	Type Name																																																																																					
10 34 000 7100	CCS-1.5-M	Male	1.78	1.5	9.5																																																																																	
10 34 000 7101	CCS-2.5-M	Male	2.28	2.5	9.5																																																																																	
10 34 000 7105	CCS-3.0-M	Male	2.58	3.0	9.5																																																																																	
10 34 000 7102	CCS-4.0-M	Male	2.88	4.0	9.5																																																																																	
10 34 000 7103	CCS-6.0-M	Male	3.53	6.0	9.5																																																																																	
10 34 000 7104	CCS-10-M	Male	4.3	10	Depending on isolation body																																																																																	
10 34 000 7200	CCS-1.5-F	Female	1.78	1.5	9.5																																																																																	
10 34 000 7201	CCS-2.5-F	Female	2.28	2.5	9.5																																																																																	
10 34 000 7205	CCS-3.0-F	Female	2.58	3.0	9.5																																																																																	
10 34 000 7202	CCS-4.0-F	Female	2.88	4.0	9.5																																																																																	
10 34 000 7203	CCS-6.0-F	Female	3.53	6.0	9.5																																																																																	
10 34 000 7204	CCS-10-F	Female	4.3	10	Depending on isolation body																																																																																	
D	Technical data: - Type: Crimp contact - Operating current: ≤40A - Contact resistance: ≤1mΩ - Material(contacts): Copper alloy - Surface(contacts): Silver plated - RoHS: Compliant - Specifications: IEC61984, EN60664-1 <table><tr><td colspan="2"> All Dimensions in mm Original Size DIN A4</td><td>Date</td><td>Drawing No.</td><td>Rev.</td><td>Scale</td></tr><tr><td colspan="2">Inkonn (Suzhou) Electric Technology Co.,Ltd.</td><td>2019-09-24</td><td>TC5793643</td><td>A00</td><td>2:1</td></tr><tr><td>Type Name</td><td>10 34 000 7204</td><td>Created by</td><td>Shuxu Huang</td><td>Checked by</td><td>Yiyi Luo</td></tr><tr><td colspan="2">CCS-10-F</td><td colspan="3"></td><td>Page 1/1</td></tr></table>					 All Dimensions in mm Original Size DIN A4		Date	Drawing No.	Rev.	Scale	Inkonn (Suzhou) Electric Technology Co.,Ltd.		2019-09-24	TC5793643	A00	2:1	Type Name	10 34 000 7204	Created by	Shuxu Huang	Checked by	Yiyi Luo	CCS-10-F					Page 1/1	D																																																								
 All Dimensions in mm Original Size DIN A4		Date	Drawing No.	Rev.	Scale																																																																																	
Inkonn (Suzhou) Electric Technology Co.,Ltd.		2019-09-24	TC5793643	A00	2:1																																																																																	
Type Name	10 34 000 7204	Created by	Shuxu Huang	Checked by	Yiyi Luo																																																																																	
CCS-10-F					Page 1/1																																																																																	
1	2	3	4	5	6																																																																																	